

PORTABLE GAS ENGINE DRIVEN SERIES



Air technology system.

KPM 3,5 - 5 - 14 - 27
ROTARY SCREW COMPRESSORS



KTCTM
KOMPAKT TECHNOLOGY COMPRESSOR

AIR TROLLEY KPM 3,5-5

Equipped with large supports and oversized puncture proof wheels to facilitate movement on any type of ground. Easy to handle. Provided with oil cooler. Available on horizontal or vertical 90 liters tank.



KPM 3,5

All KPM models are equipped with a Briggs & Stratton gas engine. A pneumatic self-regulated device accelerates the engine speed during compression and decelerates it when the maximum pressure is reached. This reduces stress on the mechanical components, extending the life of the unit. It also reduces noise level, fuel consumption and gas engine emissions.



KPM 5V



KPM 5H



Adam 60



Recoil starting system



Oil cooler

KPM 14-27

The double integrated air/oil cooler and the automatic condensate drain make the unit complete and ready for use, with excellent air quality. Outlet provided with ball valve and quick connector. Electric starter, easy to handle and equipped with hoist ring.




KPM 14



KPM 27



Pack Smart V75 XC - KPM14

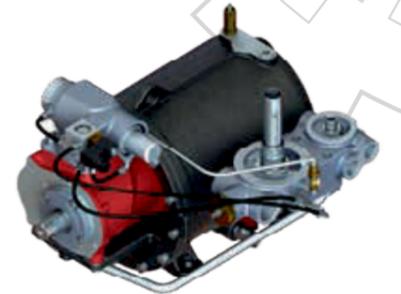

Pack Smart V90 XC - KPM 27



Electric starter



Condensate drain filter



Compressor on/off selector



Ball Valve and Quick Connector

portable series

TECHNICAL SPECIFICATIONS OF KPM SERIES

Model	Motor	Starter Type	Screw Model	Working Pressure	Free Air Delivery	Tank		Noise Level	Outlet	Dimensions	Weight	
						Air Lt	Fuel Lt					
Model	kW			Bar	ℓ/min	Lt	Lt	dB[A]		L x W x H (cm)	Kg	
KPM 3,5	B&S Vanguard	3,7	Recoil	Adam 60	10	400	7	3	88	Quick conn.	80x69x91	80
KPM 5H	B&S Vanguard	5,3	Recoil	Adam 60	8-10-13	550	90	3,6	97	Quick conn.	112x118x58	126
KPM 5V	B&S Vanguard	5,3	Recoil	Adam 60	8-10-13	550	90	3,6	97	Quick conn.	149x84x55	126

portable series

TECHNICAL SPECIFICATIONS OF KPM SERIES

Model	Motor	Starter Type	Screw Model	Working Pressure	Free Air Delivery	Tank		Noise Level	Outlet	Dimensions	Weight	
						Air Lt	Fuel Lt					
Model	kW			Bar	ℓ/min	Lt	Lt	dB[A]		L x W x H (cm)	Kg	
KPM 14	B&S Vanguard	11,8	Recoil/Electric	Packsmart V75XC	8-10-13	1200	-	8,5	97	1/2" BSPP Quick conn.	1065x833x783	160
KPM 27	B&S Vanguard OHV	16	Electric	Packsmart V90XC	8-10-13	2500	-	20	97	3/4" BSPP Quick conn.	1380x932x1050	285



KTC S.r.l
Via Palazzon, 70 36051 Creazzo (Vicenza) Italy
T +39 0444-551759 | F +39 0444- 1510104

www.ktc-air.com - info@ktc-air.com